

EP8-3A

AC SERVO DRIVER

交流伺服驱动器

MaxPulser




Operating Temperature: $-10^{\circ}\text{C} \sim 55^{\circ}\text{C}$
 Air Relative Humidity: Less Than 90% (Condensation Free)
 Work System: Continuous Operation
 Vibration: Less Than $0.5\text{g}(4.9\text{m/s}^2)$


环境温度: $-10^{\circ}\text{C} \sim 55^{\circ}\text{C}$
 空气相对湿度: $\leq 90\%$ (无凝露)
 工作制: 连续运转
 振动: 小于 $0.5\text{g}(4.9\text{m/s}^2)$



外型尺寸 Dimensions

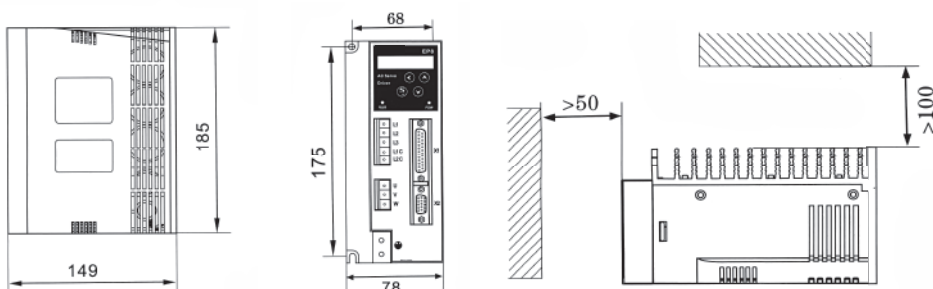

速度控制接线图

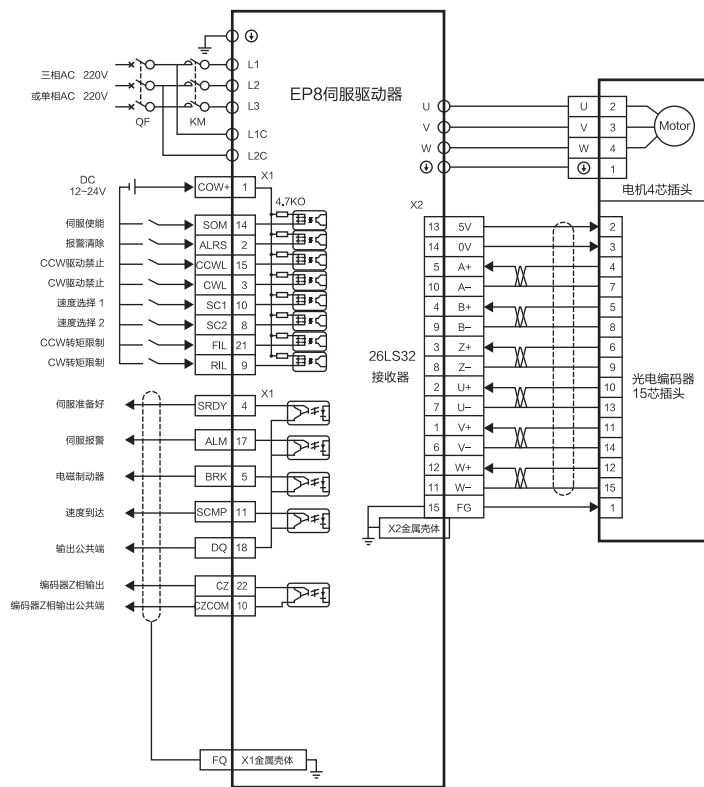

位置控制接线图

